

eXT2 SERIES



7-Inch eXT2 HMI

The 7" eXT2 Series Xpanel HMI delivers robust performance in a compact design, certified for demanding industrial environments. With enhanced processing power, high-resolution visuals, and a sleek, lightweight profile, it's built to meet rigorous standards for both functionality and durability.

Resistive

Standard:
CM-eXT2-07-R-DF

High-Brightness:
CM-eXT2-07-RH-DF

Capacitive

Standard:
CM-eXT2-07-C-DF

High-Brightness:
CM-eXT2-07-CH-DF

Product Highlights

- Wide operating temperature (-20 - +70 °C)
- High resolution, wide-screen display
- Quad-core high-speed processor
- 2GB of RAM; 8GB of Storage
- Slim profile & light weight
- Resistive and capacitive touch screen options
- 1 USB-C port, 2 serial ports, dual Ethernet ports, 1 line-out audio port, and 1 microSD card slot
- High-brightness option with 99.9% UV protection
- Canvas software
- VNC Compatibility
- FDA 21 CFR Part 11 Compliance
- Embedded SQLite Database
- Email and text notifications

Supported Drivers

- **Client Device (Ethernet):** EtherNet/IP (Allen-Bradley), EtherNet/IP (ODVA), Siemens S7, Mitsubishi MELSEC, Modbus TCP, OPC UA Client, Omron FINS, Proface GP, Fatek FBs, LSIS FEnet, CIMON PLC, ATIVA BACnet/IP, Beckhoff ADS/AMS, CODESYS V3, DNP3, Keyence Host Link
- **Client Device (Serial):** Allen-Bradley DF-1, Mitsubishi MELSEC, Modbus RTU, LSIS Cnet, Omron HostLink, Panasonic FP7, Yokogawa FA-M3, CIMON PLC, ATIVA, DNP3, Hallim Loader, Keyence Host Link, Koyo DirectNET, User Protocol
- **Server Device (Ethernet):** EtherNet/IP Server, MQTT JSON Publisher, Modbus TCP, OPC UA, Sparkplug Edge Node
- **Server Device (Serial):** Modbus RTU



Touch Panel		4-Wire Resistive		10-Point Capacitive	
Type		Standard	High-Brightness	Standard	High-Brightness
Part Number (CM-eXT2-...)		07-R-DF	07-RH-DF	07-C-DF	07-CH-DF
Enclosure	Front	Plastic		Aluminum	
	Rear	Plastic		Aluminum	
LCD Size		7 inch wide TFT color			
Colors		16.7M			
Resolution		1024 x 600 WSVGA (128:75)			
Effective Display Area		154.21 x 85.92 mm			
PPI		170			
Backlight		LED			
Luminance		1,000 cd/m ²	1,200 cd/m ²	1,000 cd/m ²	1,200 cd/m ²
UV Protective Coating		-	99.9% UV Protection	-	99.9% UV Protection
Contrast Ratio		1000:1			
Backlight Life		50,000 hours			
Touch Panel Accuracy		Active Area Width (X) ±2%, Height (Y) ±2%			
Display Orientation		Landscape (standard, 180°), portrait (90°, 270°)			
Memory		2 GB LPDDR4			
Storage		8 GB eMMC			
SD Card		1 x MicroSD card slot			
COM 1		RS-422/485			
COM 2		RS-232C			
Ethernet		2 x 10/100/1000 ports			
USB Host		1 x Type A			
Tool Port		1 x USB-C			
Audio		1 x Line-out port			
Rated Voltage		24 VDC, Class 2			
Inrush Current		30 A maximum			
Power Consumption		12 W (Max: 14 W)			
Operating System		Embedded Linux			
Project Memory		250 MB			
User Memory		4 GB			
Real-Time Clock		Real-time clock built into panel, backed up for 10 years at 25°C			
Acknowledgment Sound		Electronic buzzer			
Agency Approvals	UL	UL61010-1 / UL61010-2-201 (E231117)			
	CE	Electromagnetic Compatibility Directive 2014/30/EU (EMC)			
	FCC	The 47 CFR, Part2, Part15 and Part 18 Of FCC Requirement			
	KC	Registration of Broadcasting and Communication Equipments			
	Protection Class	IP66 / IP68 / IP69K (front), UL Type 4X, 12, NEMA Type 4X, 12			
	Hazardous Rating	-	UL C1D2	-	UL C1D2

Environmental


Type	Standard	High-Brightness
Operating Temperature	-20 – +70°C (-4 – +158°F)	
Storage Temperature	-25 – +75°C (-13 – +167°F)	
Operating Humidity	10–90% RH (below 29°C, not condensed)	
Storage Humidity	10–90% RH (below 39°C, not condensed)	

Pin Assignments

COM1: RS-422/485

PIN	Name	Description
1	RDB	Receive Data B
2	RDA	Receive Data A
3	GND	Ground
4	SDB	Send Data B
5	SDA	Send Data A


Connector

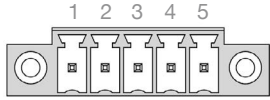

COM2: RS-232C

PIN	Name	Description
1	-	-
2	RD	Receive Data
3	TD	Transmit Data
4	-	-
5	SG	Signal Ground
6	-	-
7	RTS	Request to Send
8	CTS	Clear to Send
9	-	-


Connector



Ethernet

PIN	Description
1	TP0+
2	TP0-
3	TP1+
4	TP2+
5	TP2-
6	TP1-
7	TP3+
8	TP3-

Connector

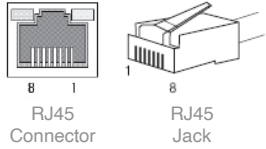

Accessories

Quantity	Description
4	Fastener
1	5-Pin Connector (RS-422/485)
1	Power Terminal Block
1	User Manual



Physical

Type	Standard	High-Brightness
Dimensions	185 x 127 x 51.9 mm (7.28 x 5.00 x 2.04 in)	
Panel Cut	177 x 119 mm (6.97 x 4.69 in)	
Weight	510 g (1.12 lbs)	

Spec Drawings

All eXT2-07 models

Units: mm / in

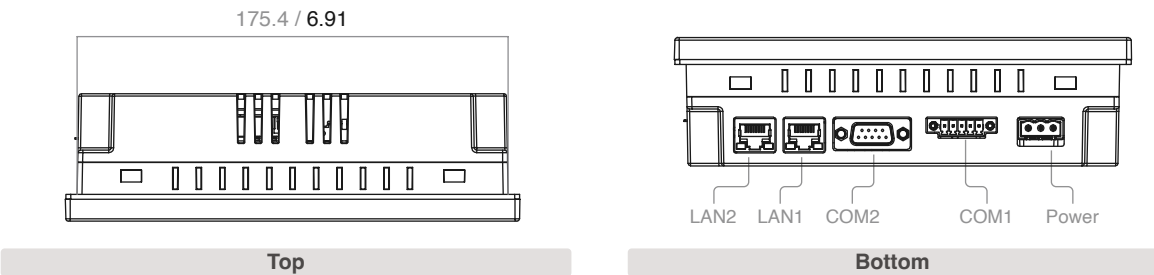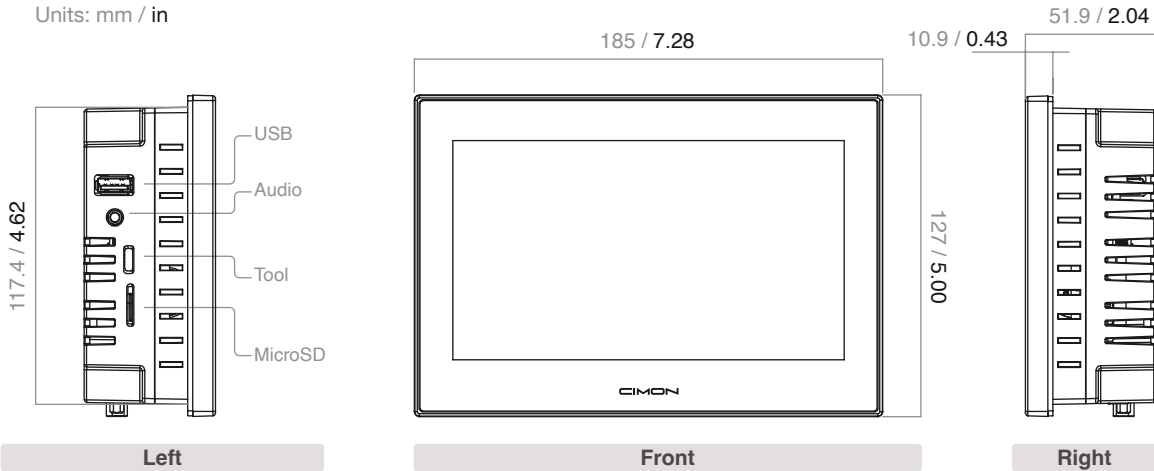

Installation

